

LED Maga



Apparecchi di illuminazione a led da esterno per installazione fissa a parete o soffitto che trovano la propria corretta applicazione dove è richiesto un punto luce con emissione con angolo flood solo verso il basso oppure verso alto e basso. L'accurata scelta dei materiali ed i trattamenti superficiali contro la corrosione eseguiti su ogni componente rendono gli apparecchi adatti a qualsiasi condizione di utilizzo in ambienti esterni.

Corpo: in lega di alluminio esteso verniciato e altamente resistente alla corrosione.

Verniciatura: di tipo poliestere eseguita a polvere, resistente agli agenti atmosferici e alla corrosione e garantita per 1.000 ore in nebbia salina. Colore Nero RAL 9005.

Staffa a muro: alluminio pressofuso EAN46100. Verniciatura di tipo poliestere, eseguita a polvere

Schermo: vetro borosilicato extra chiaro resistente agli shock termici e agli urti

Driver: incorporato

Sorgente: LED **CREE**

Outdoor LED lighting fixtures for fixed installation on the wall or ceiling, suitable when a light source is needed with a flood angle emission only downwards or upwards and downwards. The careful choice of materials and surface treatments against corrosion performed on each component make the fixture suitable for any outdoor environment use.

Housing: made by UNI 5076 die-cast aluminum, coated with polyester thermoset powder

Coating: coated with powdered polyester, resistant to atmospheric agents, corrosion and guaranteed for 1.000 hours in saline mist. Black RAL9005 color.

Wall bracket: EAN46100 die-cast aluminium. Painting: powder polyester coating.

Screen: extra-light borosilicate glass resistant to thermal shocks and impacts (satin-finish upon request)

Driver: included

Light source: LED **CREE**



Norme di riferimento
Standard reference
EN60598-1
EN60598-2-1
EN62471
EN62031
EN60598-2-5
EN61547

LED Maga W



220-240 Vac	50/60 Hz	IP66	IK08	CRI >80	+40°C -20°C	850°			driver included
-------------	----------	------	------	---------	----------------	------	--	--	-----------------



LED Maga W 1x

colour	W	LED	Optic	K	lm	pcs	Kg	CELL	Euro
N	20	Led COB	20°	4000	1900	1	1,40	32313	180,00




LED Maga W 2x

colour	W	LED	Optic	K	lm	pcs	Kg	CELL	Euro
N	2x20	Led COB	20°	4000	3800	1	1,40	32323	210,00

168


204



Cod. 32313


168

226



Cod. 32323

LED Maga C (Ø 126mm / Ø 168mm)

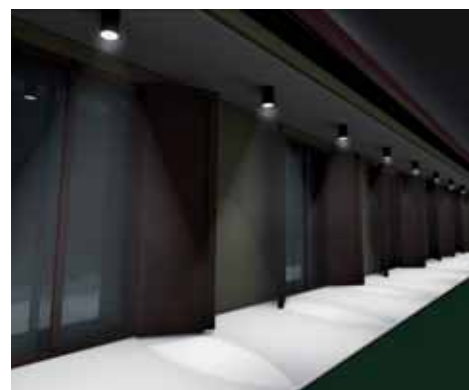


220-240 Vac	50/60 Hz	IP66	IK08	CRI >80	+40°C -20°C	850°			driver included
-------------	----------	------	------	---------	----------------	------	--	--	-----------------



colour	W	LED	Optic	K	lm	pcs	Kg	CELL	Euro
N	15	Led COB	20°	4000	1425	1	1,10	32299	120,00
N	40	Led COB	20°	4000	3800	1	1,10	32322	160,00

Ø 126


138



Cod. 32299

Ø 168

150



Cod. 32322